

OMMO
Energy Solar Micro Inverter
TM L800Mi
User Manual



OMMO TECHNOLOGY Co., Ltd.
www.ommo.com

Content

1. Safety Information	1
1.1 Safety Instructions	1
1.2 Radio Frequency Interference Statement	2
1.3 Meaning of Symbols	3
2. Overview of OMMO-E Micro inverter	4
2.1 Introduction to the OMMO-E Micro inverter System	4
3. Overview of the OMMO-E Micro inverter TM-L800Mi	4
3.1 Introduction to the OMMO-E Micro inverter TM-L800Mi	4
4. Installation Instructions for the OMMO-E Micro inverter System	5
4.1 Installation Tools Provided with the OMMO-E Micro inverter System ...	5
4.2 Parts and Tools Required by Customer	5
4.3 Installation Steps	6
4.4 Normal Operation of the OMMO-E Micro inverter Solar System	8
5. Monitoring Instructions for the OMMO-E Micro inverter Monitoring Platform	9
5.1 Monitoring Platform Download	9
5.2 Account Registration (Solarman Home)	10
5.3 Account Registration (Solarman Pro)	12
6. Troubleshooting and Maintenance Instructions	15
6.1 Status Indicators and Error Reporting	15
6.2 Troubleshooting Guide	15
6.3 OMMO-E Technical Support	15
6.4 Troubleshooting Shutdown Issues with the OMMO-E Micro inverter ...	15
7. Micro inverter Replacement	16
7.1 Replacing the Micro inverter	16
8. Technical Specifications	17
8.1 TM-L800Mi Technical Specifications	17
9. Appendix	19
9.1 Wiring Diagram for Reference	19
10. Attachments	20
10.1 Dimensional Drawing	20

1. Safety Information

The OMMO-E Solar Micro inverter TM-L800Mi is designed and tested in strict accordance with national safety standards. However, for electronic devices, the installation, commissioning, operation and maintenance must adhere to relevant safety norms. Improper handling or usage could endanger:

- ① The life and physical safety of operators or third parties.
- ② The property of operators or third parties.

To ensure the safe installation and operation of the inverter and reduce the risk of electric shock, this manual employs specific safety symbols to indicate hazards and safety precautions. Detailed instructions for the operation will be further explained in the relevant sections.

Warning

All installation operations must be carried out solely by professional technicians. Qualified technicians must:

- ① Receive professional training.
- ② Thoroughly read and understand the safety information in this manual.
- ③ Be familiar with relevant safety standards for electrical systems.

1.1 Safety Instructions

Only qualified professionals are authorized to install and replace the OMMO-E Micro inverter. Electrical installations of the OMMO-E Micro inverter must comply with local electrical codes.

Before installing and using the OMMO-E Micro inverter, read all instructions and warnings in this manual and on the inverter and solar array labels.

To avoid the risk of burns, do not touch the exterior of the Micro inverter. The casing temperature can reach up to 80°C. When disconnecting the OMMO-E Micro inverter from the solar modules, disconnect from the AC grid first.

Do not attempt to repair the Micro inverter. In case of malfunction, contact OMMO-E customer service for a return merchandise authorization and initiate the return process.

1.2 Radio Frequency Interference Statement

EMC Compliance: This device complies with relevant EMC requirements. The purpose of EMC regulations is to prevent harmful radio frequency interference when installing electronic products in residential areas. This device meets the requirements for Class B digital devices. If not installed or used according to the instructions, the device may emit radio frequency energy, potentially causing harmful interference to radio communications. However, that interference will not occur in a particular installation cannot be guaranteed. If this device causes harmful interference to radio or television reception, consult the dealer or ask someone skilled in radio technology for help. Any unauthorized changes may void the user's authority to operate the device.

1.3 Meaning of Symbols



Caution, risk of electric shock!



Caution, the surface is hot to the touch!



Caution, high voltage danger!



The CE mark is affixed to the solar inverter to verify that the equipment complies with the regulations of the European Low Voltage and EMC Directives.



Refer to the operating instructions.



Symbol for the marking of electrical and electronics devices according to Directive 2002/96/EC. Indicates that the device, accessories and the packaging must not be disposed as unsorted municipal waste and must be collected separately at the end of the usage. Please follow Local Ordinances or Regulations for disposal or contact an authorized representative of the manufacturer for information concerning the decommissioning of equipment.

Qualified
Installation
Technicians

Individuals who are advised or supervised by electrical technicians, enabling them to perceive risks and avoid hazards that electricity might cause. In the context of this manual's safety information, 'qualified personnel' refers to individuals who are familiar with safety, electrical systems and EMC requirements and authorized to energize, ground and label equipment, systems and circuits following established safety procedures. The inverter and photovoltaic system must only be commissioned and operated by qualified personnel.

2. Overview of OMMO-E Micro inverter

2.1 Introduction to the OMMO-E Micro inverter System


The OMMO-E Micro inverter TM-L800Mi solar energy system is designed for grid-tied applications, as shown in the system diagram below. It consists of:

OMMO-E Micro inverter

Wi-Fi Router

Monitoring and Analysis Cloud Platform

The OMMO-E Micro inverter enhances system power generation, improves safety, increases system reliability and simplifies the design, installation, maintenance and management of solar energy systems (Software Version: TM800DE1.0).

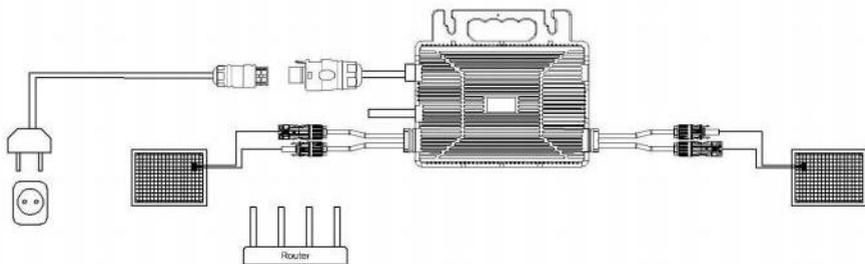

3. Overview of the OMMO-E Micro inverter TM-L800Mi

3.1 Introduction to the OMMO-E Micro inverter TM-L800Mi

The OMMO-E Micro inverter TM-L800Mi boasts an output power of up to 800 W, catering to today's mainstream solar modules. The inverter is an isolated inverter with an internal isolation transformer (reinforced insulation). Innovation and rigorous design have maximized energy production. The product utilizes full silicone encapsulation to reduce stress on electronic components, enhance heat dissipation, improve waterproofing and ensure reliability through stringent testing methods. System monitoring is available around the clock via an app or web portal, facilitating convenient operation and maintenance.

Key Features of the OMMO-E Micro inverter TM-L800Mi:

Convenient installation

Accommodates two solar panels per unit ($V_{oc} < 60$ Vdc)

Output power of 800 W

IP67-rated for high-level protection

Wi-Fi communication capabilities

Built-in safety protection relay

Compatible with crystalline silicon modules

4. Installation Instructions for the OMMO-E Micro inverter System

The installation of the Ommo-E Micro inverter solar system is user-friendly. The Micro inverter can be easily mounted on the module rack. Installation must comply with local regulations and technical standards.

Special Note: We recommend installing a residual-current device only as required by local electrical codes.

Warning

- ① Adhere to local electrical codes for installation.
- ② Only qualified professionals should perform the installation and replacement of the Micro inverter.
- ③ Ensure reliable grounding of the solar modules and racks used with the Micro inverter.
- ④ Before installing and using the Micro inverter, read all instructions and warnings in this manual, as well as the labels on the Micro inverter and solar modules.

4.1 Installation Tools Provided with the OMMO-E Micro inverter System

- AC connector end caps
- Removal tool
- Antenna rod

4.2 Parts and Tools Required by Customer

In addition to the solar modules and their related hardware, customers need to prepare:

AC junction box

Hardware suitable for mounting brackets

Socket and wrench for mounting hardware

Multi-meter, safety goggles and other relevant auxiliary tools

4.3 Installation Steps

4.3.1 Step 1 : Verify that the grid voltage matches the voltage rating on the Micro inverter 's label.

4.3.2 Step 2: Connect the AC connector.

- a. Position the Micro inverter and AC cable at their appropriate locations.
- b. Connect the AC male port of the Micro inverter to the combiner box or integrate it into the grid.
- c. Wiring method: Live (L) - red; Neutral (N) - black; Protective Earth (PE) - yellow/green.

Warning ⚠

Wiring colours may vary by region. Check all the electrical wires before connecting the Micro inverter to ensure they match.


Incorrect wiring can damage the Micro inverter and is not covered under the warranty. You are advised to use the TC-ER 12AWG AC cable to connect the micro inverter.

Warning ⚠

Do not carry the inverter by the AC cables during transportation.

4.3.3 Step 3: Install the OMMO-E Micro inverter on the bracket.

- a. Mark the position on the bracket where the Micro inverter will be installed, considering the distance from the solar module's junction box or any other obstructions.
- b. Use the parts and tools recommended by the bracket supplier to secure each Micro inverter in its designated position. Ensure the grounding clip of the inverter is facing towards the bracket.

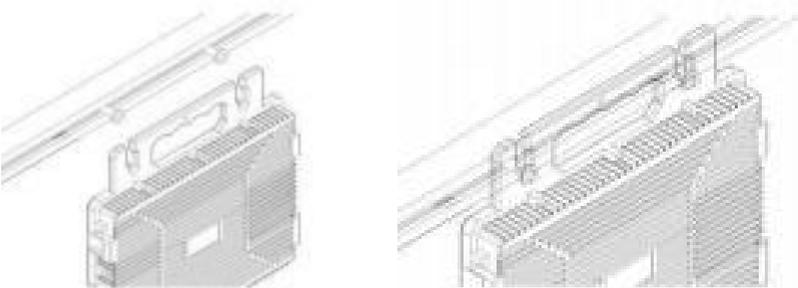

Warning ⚠

Do not install the Micro inverter in places directly exposed to sunlight, rain or snow, including the gaps between panels. A fully covered installation point is preferable. Ensure ample ventilation space around the Micro inverter for cooling. The bracket for the inverter must be reliably grounded.


4.3.4 Step 4: Ground the system.

Before connecting the DC input and AC output, the grounding hole provided by the Micro inverter must be connected to an


external ground..The PV modules used to connected to this inverter shall be Class A rating certified according to IEC 61730.

4.3.5 Step 5: Connect the OMMO-E Micro inverter.

Insert the AC male connector of the Micro inverter into the AC female connector until a clear ‘click’ sound is heard.

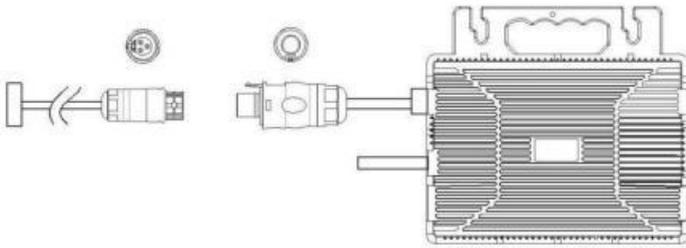

4.3.6 Step 6: Connect the OMMO-E Micro inverter to the solar modules.

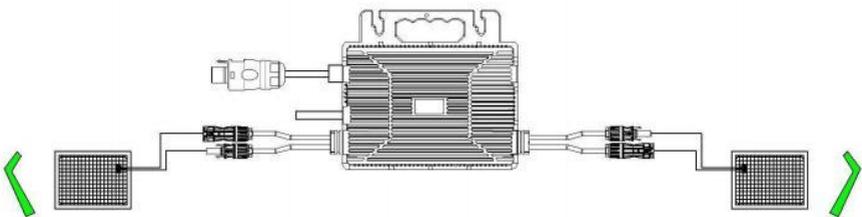

Warning Δ

The connection cable between the PV module and OMMO-E Micro inverter must be less than 3 meters. The PV modules should not be grounded

4.3.7 Step 8: Connect the Micro inverter to the grid.


Caution

Install an AC circuit breaker (air switch) at the grid connection point in accordance with the access capacity or regulatory requirements.

Do not install a residual current device (RCD) for the photovoltaic power system to avoid false triggering of the protection mechanism.

4.3.8 Step 9: Use the AC extension cord.

When the use of an AC extension cord is necessary, users may connect it to the Micro inverter's AC port. Alternatively, the OMMO-E Solar AC connector (available as an optional purchase) can be used.

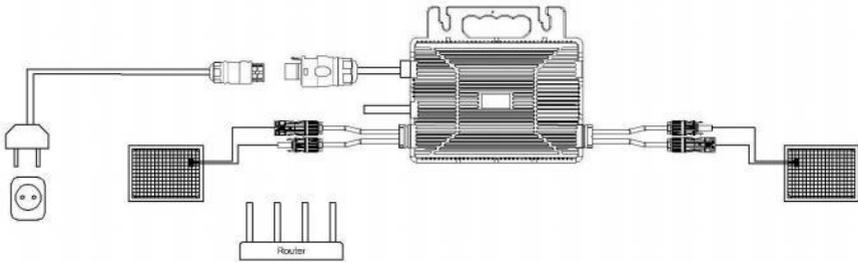

4.4 Normal Operation of the OMMO-E Micro inverter Solar System

To ensure the normal operation of the OMMO-E Micro inverter solar system:

1. Close the AC circuit breaker for each Micro inverter branch.
2. Close the main grid circuit breaker, and the system will start generating electricity after approximately one minute.
3. The Micro inverter's LED behaviour can serve as an indicator of the Micro inverter's status.

5. Monitoring Instructions for the OMMO-E Micro inverter Monitoring Platform

5. 1. Monitoring Platform Download

For residential users of photovoltaic power stations, using the ‘Solarman Home ’ app is recommended. Scan the QR code below to download the app or search for ‘Solarman Home ’ in the Google Play Store (Android) or App Store (iPhone). You can also visit the web version (<https://home.solarmanpv.com>) to view data.



Solarman Home

For professionals in the photovoltaic industry, such as dealers, equipment vendors or maintenance service providers, it is recommended to use the ‘Solarman Pro ’ app. Scan the QR code below to download the app or search for ‘Solarman Pro ’ in the Google Play Store (Android) or App Store (iPhone). You can also log in to the web version (<https://pro.solarmanpv.com>) to view data.



Solarman Pro

5.2 Account Registration (Solarman Home)

5.2.1 Open the Solarman Home app and click 'Register New Account' to create an account.

10:18

Register

E-mail Phone Number

Registration Region

Poland

E-mail

E-mail

Verification Code

Verification Code Send

Password

Password

Password at least 6 bits

Done

I have read and agreed to [T&C](#) and [Privacy Policy](#)

10:18

Poland

SOLARMAN Smart

E-mail Phone Number Username

E-mail

E-mail

Password

Password

I have read and agreed to [T&C](#) and [Privacy Policy](#)

Log In

Register a new account Forgot your account or password?

Local Mode

5.2.2 To create a power station, click 'Add Now' and fill in the basic information.

10:21

Plant Info

Basic Info

Plant Name Name your plant

Time Zone (UTC+08:00) Beijing, Chongqing, Hong Kong, Urumqi

System Info

Plant Type Residential Rooftop

System Type Please select

Installed Capacity(kWp) Please enter

Operating Date 2024-10-21

Yield Info

Currency CNY

Unit Price(CNY/kWh) Please enter (Optional)

Total Cost(CNY) Please enter (Optional)

Done

10:21

My Plants



No power plants

Add Now



Top up Service

Plant Me


5.2.3 To add a collector, click ‘ + ’ in the top right corner, then click ‘Add a Logger ’ and manually enter the SN number or scan the QR code.

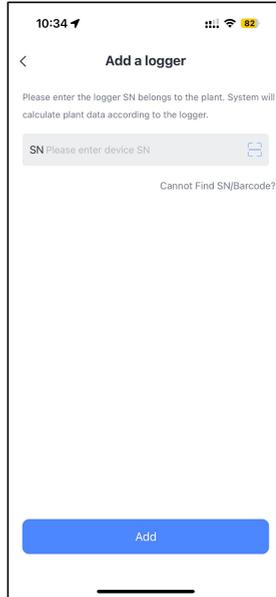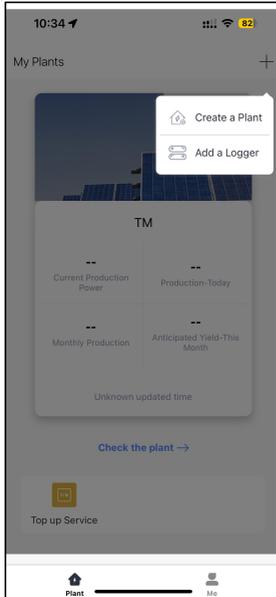

5.2.4 Configuring the network: Click ‘ Proceed to Configure ’ to set up the network and select 2.4G because 5G is not supported. (Ensure your phone ’s Wi-Fi and Bluetooth are enabled.)

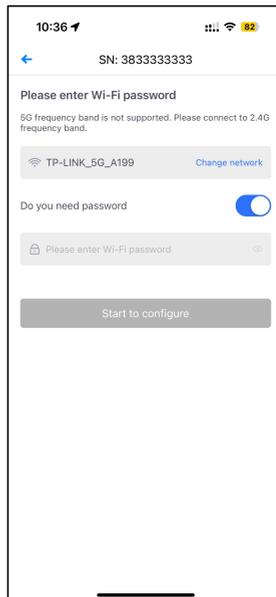
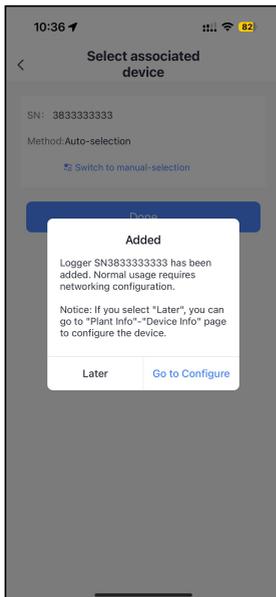


Wait a few minutes, then click 'Finish' to view the power station data.


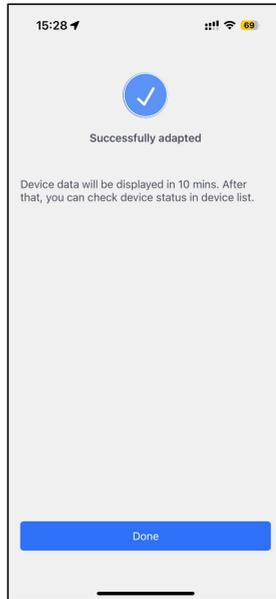


5.3 Account Registration (Solarman Pro)



5.3.1 To register, open the Solarman Pro app and click 'Register' to create an account.

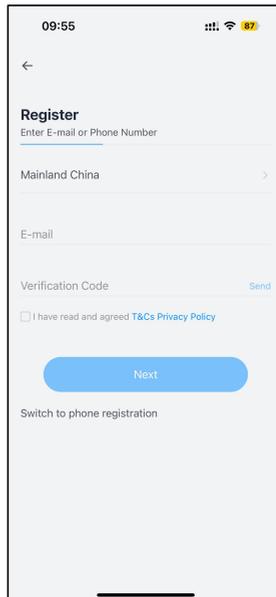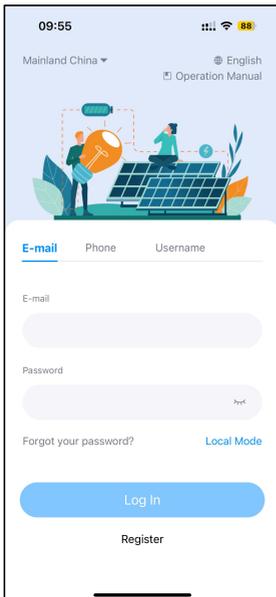

5.3.2 Creating a power station: Click the ‘+’ icon in the top right corner, then click ‘Power Station’ and fill in the basic information.

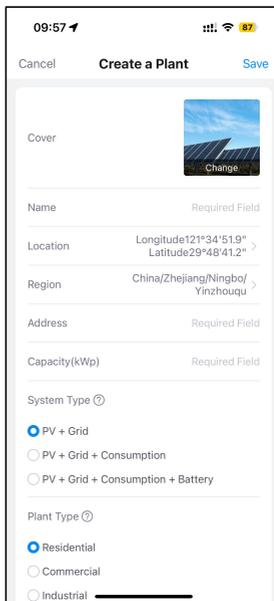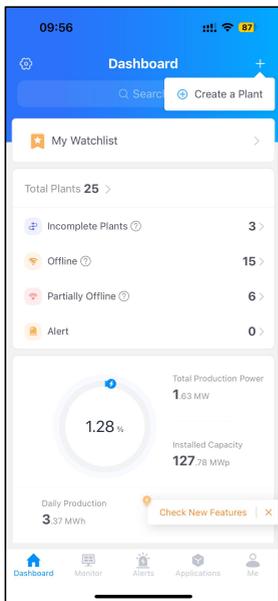


5.3.3 Adding a Collector: Click ‘+’, then ‘Add New Gateway/Collector ’and either scan the QR code or manually enter the SN number.

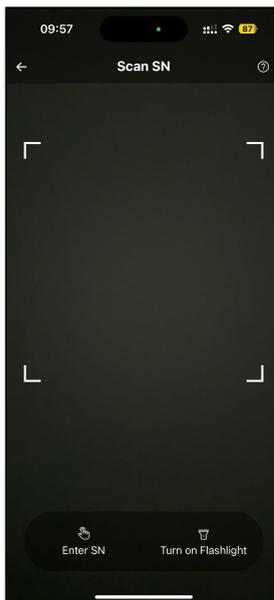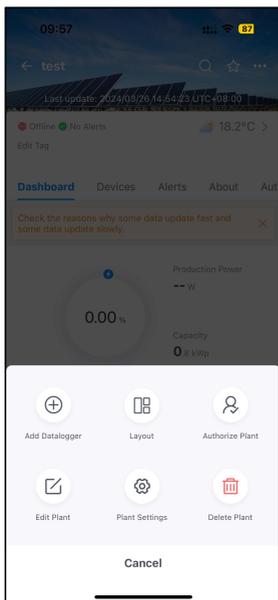


5.3.4 Network Configuration

Click 'Application' > 'Wi-Fi Configuration', then scan the QR code or manually enter the SN number. Choose 2.4 G because 5 G is not supported.

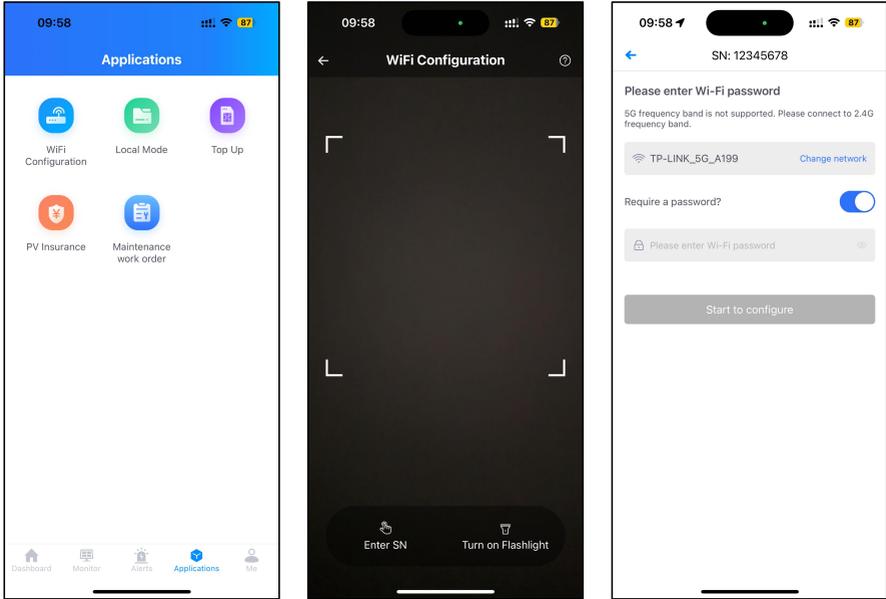

Wait a few minutes, then click 'Finish' to view the power station data.

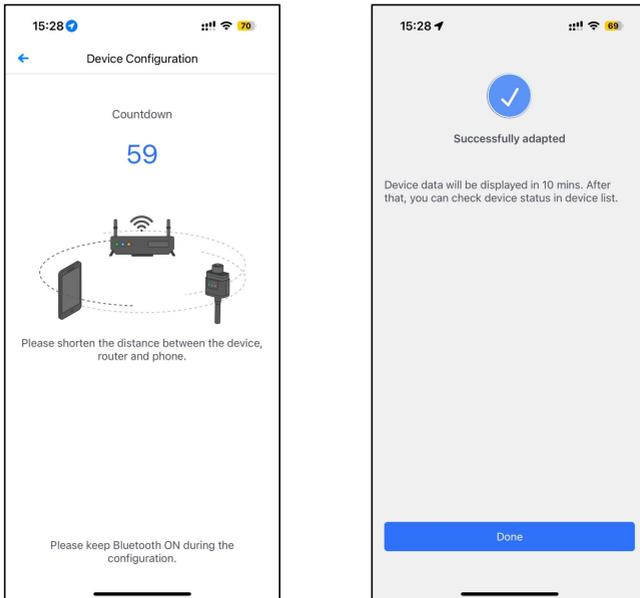

6. Troubleshooting and Maintenance Instructions

Only qualified professionals should perform the following troubleshooting actions when the OMMO-E Micro inverter solar system is not functioning correctly.

6.1 Status Indicators and Error Reporting

Observing the indicator lights can provide a good understanding of the Micro inverter's status.

6.1.1 Operation indicator light

If the LED is off, check the DC side wiring or contact your local dealer.

If the red light is continuously on, check whether both DC inputs are connected correctly.

6.2 Troubleshooting Guide

Before going on-site for troubleshooting, installers can remotely check all information via their installer account, either on the web or using the mobile app. Accessing module data (DC, AC, voltage and current) can offer an initial understanding of potential issues. Professional installers can also refer to our troubleshooting guide for a comprehensive approach to diagnosing and fixing issues with photovoltaic installations powered by the OMMO-E Micro inverter.

6.3 OMMO-E Technical Support

The OMMO-E technical support team is available to assist professional installers in becoming familiar with our products and provide troubleshooting support for installations when necessary.

6.4 Troubleshooting Shutdown Issues with the OMMO-E Micro inverter

The OMMO-E Micro inverter requires no specific routine maintenance.

Warning ⚠

Do not attempt to repair the OMMO-E Micro inverter yourself. If troubleshooting efforts fail, return the unit to the manufacturer for replacement.

Warning ⚠

Only qualified professionals are allowed to perform troubleshooting procedures on the OMMO-E Micro inverter.

Warning

1. Do not disconnect the DC side of the inverter while it is still operational. Ensure there is no current flow before disconnecting the DC side.
2. When disconnecting the OMMO-E Micro inverter from the solar modules, disconnect from the AC grid first, and ensure that the grounding hole provided by the Micro inverter remains grounded at all times.
3. The OMMO-E Micro inverter is powered via the DC side of the solar modules.

7. Micro inverter Replacement

7.1 Replacing the Micro inverter

Follow the steps below to replace a faulty OMMO-E Micro inverter:

- A. Disconnect the OMMO-E Micro inverter and the solar modules in the following order:
 1. Turn off the branch AC circuit breaker.
 2. Disconnect the AC connector of the Micro inverter.
 3. Disconnect the DC connector between the solar modules and the Micro inverter.
 4. Remove the Micro inverter from the photovoltaic rack.
- B. Install the replacement Micro inverter onto the rack. When connecting the DC wires to the new Micro inverter, observe the indicator light's behaviour.
- C. Connect the AC connector of the replaced Micro inverter.
- D. Close the branch circuit breaker and verify the operational status of the replacement Micro inverter.

8. Technical Specifications

Warning

① Ensure that the output current and voltage of the solar modules match those of the Micro inverter.

② The DC operating voltage range of the solar modules must fall within the input voltage range of the OMMO-E Micro inverter.

③ The maximum open-circuit voltage of the solar modules must not exceed the maximum input voltage of the OMMO-E Micro inverter.

8.1 TM-L800Mi Technical Specifications


Model	TM-L800Mi
Input Data (DC)	
Recommended PV Module Power	280W-550W
Start-up Voltage	20V
MPPT Voltage Range	25-55V
Max. Input Voltage	60V
Max. Input Current	13.5A*2
Max. DC Short Circuit Current	16.5A*2
Number of MPPTs	2
Output Data (AC)	
Rated Output power	800W
Nominal Output Voltage	230V
Extended Output Voltage Range	184V-253V
Max. Output Current	4A
Nominal Output Current	3.47A
Nominal Frequency/Range	50Hz/45 - 55
Power Factor	>0.99 (default)
Total Harmonic Distortion (THD)	<3%
Max. Units Per Branch	5

Efficiency	
Peak Efficiency	96.00%
CEC Efficiency	95.5%
Static MPPT Efficiency	99.5%
Night Time Power Consumption	<50mW
Mechanical Data	
Ambient Temperature Range	-40°C ~ +65°C
Dimensions(WxHxD)	260mm*225mm*32mm
Weight	2.9kg
Enclosure Rating	IP 67
Cooling	Natural Convection - No Fans
Type of Isolation	High Frequency Transformers
Monitoring & Communication	
Communication	WiFi
Energy Management	Solarman Online Platform
Certifications & Warranty	
Certifications	IEC62109-1 , IEC62109-2:IEC61000-6; VDE4105; VRF2019; NEN-EN50549-1:2019; PN-EN50549-1:2019
Warranty	5 Years Standard

Note: This manual is subject to change without notice. For any inquiries, contact OMMO-E customer service.

9. Appendix

9.1 Wiring Diagram for Reference

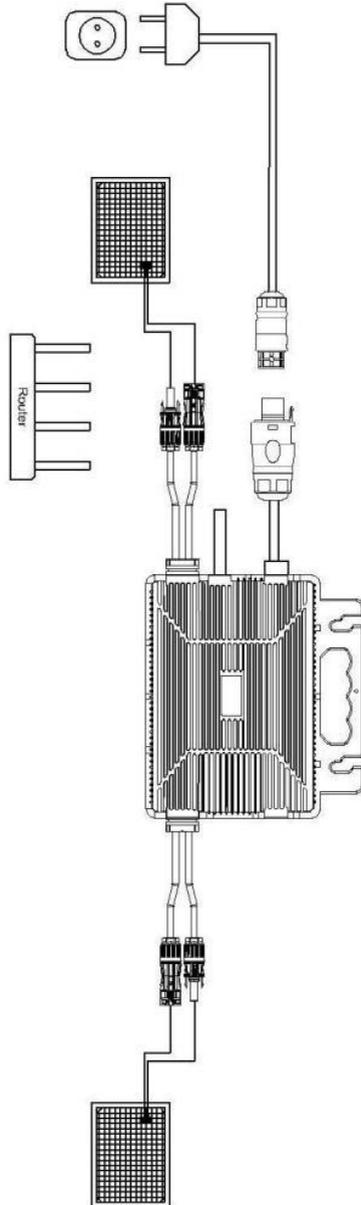

10. Attachments

10.1 Dimensional Drawing

